



March 31<sup>st</sup>, 2023

Templeton Sewer Dept. & Wastewater Facility  
33 Reservoir St  
Baldwinville, MA 01436

RE: UTILITY NOTIFICATION LETTER  
MASSDOT Contract 120707  
FAP# NHP(NHS)-003S(614)X  
Resurfacing and Related Work on a Section of Route 2 in the towns of Phillipston and  
Templeton

To Whom It May Concern,

This letter is to notify you that P.J. Keating has been awarded contract 120707 with MASSDOT and is the General Contractor on the referenced project. Per the Contract Documents and Specifications, the contract is required to notify utilities of the upcoming work.

Work will commence on April 10<sup>th</sup>, 2023. Attached to this letter please find a locus map of the project.

This project consists of resurfacing Route 2 in Phillipston and Templeton. The eastern limit is the Templeton/Gardner Town Line, mile 84.92. The western limit is located at a pavement joint just west Rt 202 at mile 78.89. The total length of this project is approximately 6.0 miles. The limits of work also include the ramps at exit 83, 82, 79 and the eastbound rest area just west of the Templeton/Gardner town line.

The contract work includes the following:

- Pavement fine milling and resurfacing the existing mainline and ramps. The mainline shall be milled 2 inches and paved with 2 inches of Superpave High Rap Surface Course – 12.5 – Polymer (SSC – HR -12.5 – P). Ramps shall be milled 2.5 inches and paved with 2.5 inches of Superpave High Rap Surface Course – 12.5 – Polymer (SSC – HR - 12.5 – P).
- Recessed polyurea pavement markings, wet reflective recessed preformed, and recessed reflectors shall be installed throughout the project.
- Restoration of the eastbound rest area.
- Tree and shrub clearing withing 20 to 30 feet of the highway and ramps.
- The bridge work varies between milling and full depth paving in accordance with bridge repair details.
- The locations of partial and full depth deck repairs will be determined by visual inspection above and below, by sounding the stripped deck, and as required by the Engineer.
- Concrete barrier/parapet and end post repairs will be made as required by the Engineer.
- Existing metal bridge railing that is either damaged or missing will be replaced in-kind.

**P. J. Keating**  
998 Reservoir Road  
Lunenburg, MA 01462

**T** +1 (978) 582 5200  
**F** +1 (978) 582 7027

[www.pjkeating.com](http://www.pjkeating.com)



If you have any questions or require further clarification, please contact me at your earliest convenience. Thank you.

Respectfully,

P.J. KEATING CO.

Jeff McCorkle  
Construction Manager


**P. J. Keating**  
998 Reservoir Road  
Lunenburg, MA 01462

**T** +1 (978) 582 5200  
**F** +1 (978) 582 7027

[www.pjkeating.com](http://www.pjkeating.com)



**PHILLIPSTON - TEMPLETON**  
**Federal Aid Project No. NHP(NHS)-003S(614)X**  
**Resurfacing and Related Work on a Section of Route 2**

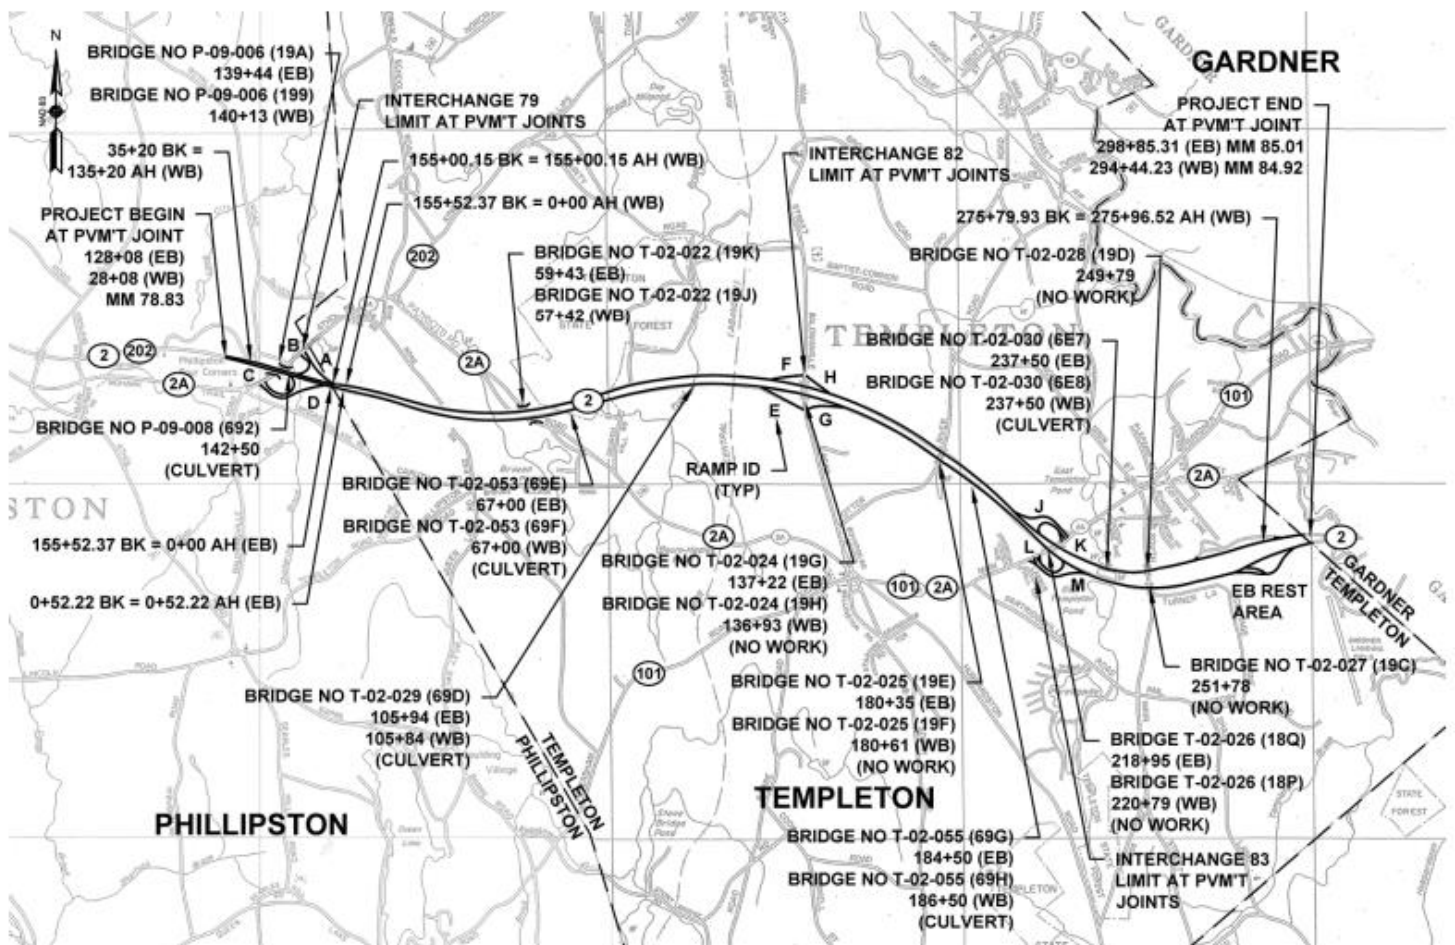

www.pjkeating.com